


winlove


SOLAR POWER BANK

User Manual

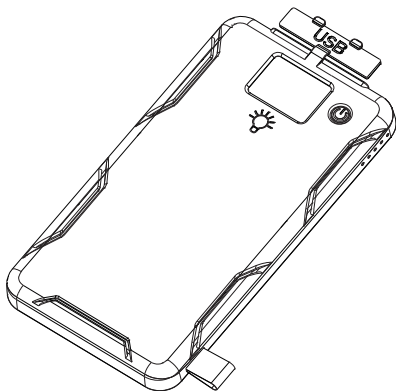


BEST GIFT FOR OUTDOOR

LAYOUT

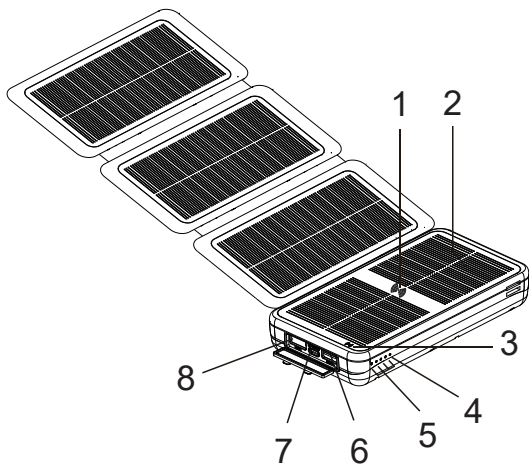

1.Wireless Charging	6.USB 01 output port
2.HD Solar panels	7.Type-C input & output port
3.Wireless charging indicator	8.USB 02 output port
4.LED indicator: charging status via solar panel	
5.LED indicator: charging status or power display	

LAYOUT

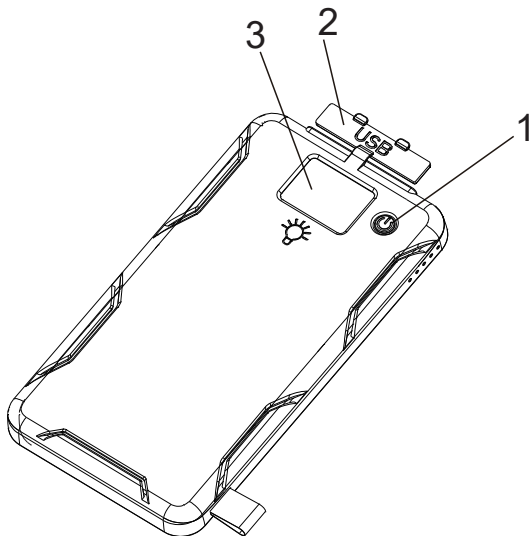

1. Power switch (wireless charging & LED flashlight)

2. Waterproof sealing cap

3. LED flashlight

SPECIFICATION

 Capacity	30000mAh
 Solar Input	4 X 300 mAh
 Input (Type-C)	DC 5V/3A ,9V/2A, 12V/1.5A
 Output (USB)	DC 5V/3A ,9V/2A, 12V/1.5A
 Out Power	18W (max)
 Wireless	5V / 2A 10W
 Waterproof	IP66
 LED Number	9 LEDs
 Size	6.14x3.3x1.57 inch

QUICK CHARGE

1. To charge the power bank: link the solar charger with the phone adapter through the power cord, the solar charging bank blue charging display light will start flashing and the battery will be fully charged after about 7 hours.



Note: Please fully charge the power bank for the first time, in order to improve the charging efficiency, please do not drain the power completely.

2. Charging for cell phone: Connect the cell phone charging cable to the cell phone, the blue display light will be on constantly.



Note: The solar charger supports PD 18W (max) fast charging, please use the original power cord of your phone to charge the device fast.



Note: There will be a little heat during the charging process, but this is normal, please do not worry, we choose high-quality materials to ensure the safety of the use of the product.

WIRELESS CHARGING

Solar charger supports 5V 2A 10W(max) charging output power, can charge cell phones wirelessly.

Compatibility List: iPhone 11/XR/ XR MAX/ XS/ X/ 8/ 8plus, Samsung Galaxy S10/S9/S9plus S8/S8plus and other low power wireless charging devices.

How to use

Press the power switch button once before using the wireless charging, the purple display light flashes three times to turn on the wireless charging function.

Align the center of the phone with the center of wireless charging, the blue display light will be on, indicating that the device is charging wirelessly.

If the device is not charging, the red light will flash, please confirm whether the device supports wireless charging function and then reposition the device in the center of the wireless charging panel.



Note: Wireless charging has an automatic hibernation function, if no available device is detected within 20 seconds after wireless charging is turned on, the wireless charging function will be automatically turned off, please lightly press the power switch button to use again.

LED FLASHLIGHT

The versatile LED flashlight is the perfect outdoor travel companion, allowing you to easily deal with power outages or nights.


Long press the power button for 3 seconds to turn on the flashlight and enter strong light mode.

Short press a second time to switch to low light mode.

Short press the third time to switch to SOS mode.

Short press the fourth time to switch to flashing mode.

Short press for the fifth time or any time long press for 3 seconds to turn off the flashlight.

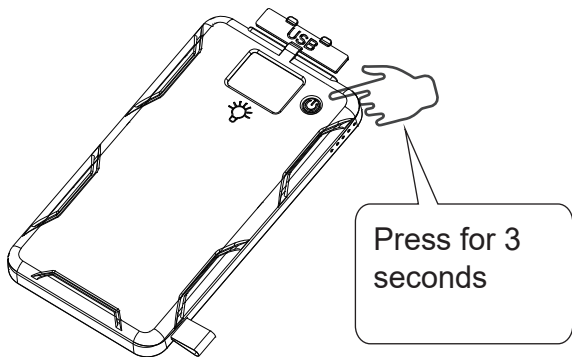

TROUBLESHOOT

Can't use solar charging?

Please fully expand the four solar panels and place them flat in direct sunlight, the green display light on the side indicates that the solar panels are charging.

Note: Solar panels can only be charged in daylight, indoor light sources are not effective. Solar charging efficiency is affected by light intensity, temperature and weather conditions. Please use it as an emergency charging method and use the USB cable for daily charging.

Can't use wireless charging?

Each time you use wireless charging, please press the power switch and place the phone in the center of the wireless charging panel after the purple light flashes three times, the blue display light is always on to indicate the phone is charging.

Note: Please make sure your phone supports wireless charging before use. If the red light flashes to indicate wireless charging failure, please adjust the phone position to align with the wireless charging position. The wireless charging process will generate heat, please do not worry it is normal.

ATTENTION



To preserve battery lifespan, use and recharge at least once every 4 months.



Use original or certified cables for better charging experience.



IP66 waterproof can only preserve from light rain, please don't expose to liquids.



Avoid using the power bank below 32 Fahrenheit degree or over 122 Fahrenheit degree.



Don't drop off the device at high place, it can only avoid broken under 1.5 meters.



Avoid dropping the solar charger to hard object.



Don't disassemble. It's dangerous to disassemble power bank without professional guidance.

CUSTOMER SERVICE



3-month refund warranty



12-month limited warranty



Lifetime technical support




support@winlove.vip

For FAQs and more information, please visit our website



<http://www.winlove.vip> 



Or scan the QR code to visit